

# 校准证书

## CALIBRATION CERTIFICATE

证书编号:

Certificate No.



J202105206850-0003

第 1 页 共 4 页

Page of

委托方

Client

联络信息

Contact Inf.

See more at: <http://www.china-gauges.com/>

仪器名称

Description

IEC 62368 Figure V.2 Unjointed Test Finger

型号/规格

Model/Type

LX-5011

制造厂

Manufacturer

HK LEE HING  
INDUSTRY CO.,  
LIMITED

出厂编号

Serial No.

JLX2021G201014

管理号

Asset No.

-----

接收日期

Receipt Date

2021年05月24日

Y M D

校准日期

Cal. Date

2021年05月29日

Y M D

发布日期

Issued Date

2021年05月29日

Y M D

批准

Approved by

李平 (副总工)

审核

Inspected by

伍水生

校准

Calibrated by

曾佩余



总部地址(Headquarters Add.): 广东省广州市黄埔大道西平云路163号

No.163.Pingyun Rd, West of HuangPu Ave.Guangzhou Guangdong China

实验室地址(Add.of the Lab): 广东省广州市黄埔大道西平云路163号

No.163.Pingyun Rd,West of HuangPu Ave.Guangzhou,Guangdong,China

联系电话(Tel.):400-602-0999

邮政编码(Postcode):510656

网站(Website):[http:// www.grgtest.com](http://www.grgtest.com)

电子邮件(E-mail):[grgtest@grgtest.com](mailto:grgtest@grgtest.com)

扫一扫验真伪

## 校准说明 DIRECTIONS OF CALIBRATION

证书编号: J202105206850-0003

第 2 页 共 4 页

**Certificate No.**

Page of

- 1.本实验室的质量管理体系符合ISO/IEC 17025:2017标准的要求。  
(The quality system is in accordance with ISO/IEC 17025:2017.)
- 2.本结果仅对本次校准样品有效。未经实验室批准,不得部分复制。如有疑问请在15个工作日内反馈。  
(The result is only valid for the calibrated sample.The certificate shall not be reproduced except in full,without the written approval of our laboratroy .please feedback to us within 15 days if you have any question.)
- 3.本证书编号具有唯一性,后缀若带有“-Gx”的证书为替换证书,自发出后原证书即刻作废。  
(Each certificate has a unique number. The suffix of "-Gx" will be added to the number as a replacement of the old version. The original certificate will be officially invalid once the new certificate number is issued.)
- 4.证书中最大允许误差、判定结果仅供参考,其中“P”代表“合格”,“F”代表“不合格”,“N/A”代表“不适用”。使用人员应结合实际测量需求,评估测量不确定度对符合性评定的影响。(MPE & judgement result in the datasheet is only for reference, "P" is "Pass", "F" is "Fail" and "N/A" is "Not Applicable".Whereas users should evaluate the effects of MU of calibration results on conformance assessment by actual measurement.)
- 5.本次校准的技术依据及CNAS认可范围,超出范围的内容未被认可。详细认可范围请查看CNAS网站中注册编号为L0446的证书附件。(Reference document and accredited scope by CNAS for calibration, beyond which isn't accredited. Please see the attachment of certificate No.L0446 on CNAS website for details.)  
GRGJL.WI-CD-09-QBJZ100-2016试验指、棒、销、钩、探针校准方法 (Test finger,rod,pin,hock,probe) 长度: (0~1000) mm 角度: 10°~120° 力值: (0.001~200) N

6. 本次校准使用的主要测量标准(Main Standards of Measurement Used in the Calibration.):

名称 Description	编号 Serial No.	证书号/有效期 Certificate No./ Due Date	溯源机构 Traceability Institute	技术特征 Technique Character
图像处理万能工具显微镜	ZH0020	CYY202100232 2022-03-17	广东省计量科学 研究院	MPE: (1+L/100)μm
数显卡尺 Digimatic Caliper	B17080266	J202104207346- 0009 2022-04-25	广州广电计量检 测股份有限公司	MPE:± (0.02~0.03) mm
数显推拉力计	61103	J202010132022- 0008 2021-10-13	广州广电计量检 测股份有限公司	1.0级

7. 校准地点、环境条件(Place and environmental conditions of the calibration):

地点 Place	广州计量长度精密测量室	温度 Temperature	20.6 °C	相对湿度 Relative Humidity	59 %
-------------	-------------	-------------------	---------	---------------------------	------

8. 建议复校时间间隔: 1 年,送校单位也可按实际使用情况自主决定。  
Suggested calibration interval is 1 year or it can be altered depending on the actual usage of the user.



## 校准结果 RESULTS OF CALIBRATION

证书编号: J202105206850-0003

第 3 页 共 4 页

Certificate No.

Page of

1、外观: 符合要求  
Appearance: Pass

2、尺寸测量:  
Dimension measurement:

项目 Item	标准要求(mm) Specifications	实测值 (mm) Measured Value	扩展不确定度 (mm) $U(k=2)$	结论 (P/F) Conclusion
尺寸(mm)	$10^{0}_{-0.05}$	9.96	0.01	P
	$20^{0}_{-0.05}$	19.97	0.01	P
	$80^{+0.2}_{-0.2}$	79.98	0.05	P
	$2^{+0.05}_{-0.05}$	2.02	0.02	P
	$4^{+0.05}_{-0.05}$	3.98	0.02	P
	$12^{0}_{-0.05}$	11.96	0.01	P
	$50^{+0.2}_{-0.2}$	49.90	0.03	P
	$5^{+0.5}_{-0.5}$	4.95	0.03	P
角度	$37^{\circ 0}_{-10'}$	36°59'	3'	P
	$14^{\circ 0}_{-10'}$	13°51'	3'	P

3、力值测量:  
Force measurement

标称值 (N) Nominal	实测值 (N) Measured Value	扩展不确定度 $U_{rel}(k=2)$
10	10.2	5%
20	20.2	5%
30	30.1	5%
40	39.9	5%
50	49.8	5%

测股  
与专用  
(1)


# 校准结果 RESULTS OF CALIBRATION

证书编号: J202105206850-0003

第 4 页 共 4 页

Certificate No.

Page of

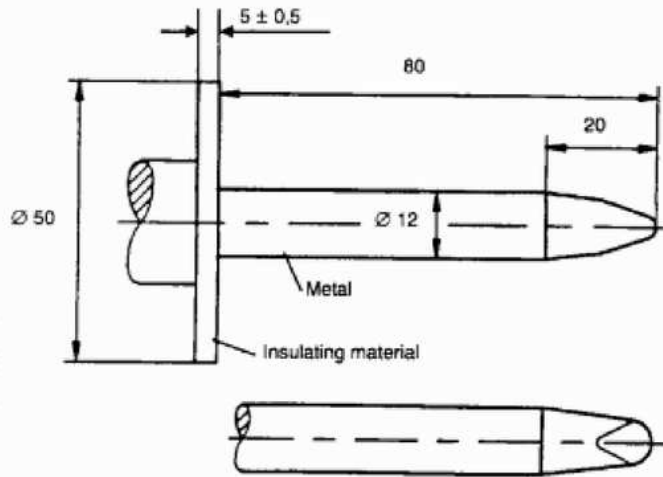

Dimensions in millimetres

备注:

Notes:

结论(Conclusion): 所校准项目符合技术要求

1.本报告中的扩展不确定度是由标准不确定度乘以包含概率约为95%时的包含因子 $k$ 。

The expanded uncertainty is given in the report by the standard uncertainty multiplied by the probability of about 95% when the factor  $k$ .

2.依据(Reference document)

JJF 1059.1-2012 测量不确定度评定与表示

(JJF 1059.1-2012 Evaluation and Expression of Uncertainty in Measurement)

3.技术指标来自于:

IEC61032

Technical indicators source:

(以下空白)

(The below is blank)