
BS EN 61000-6-1:2001

compatibility (EMC) and Child Child

The European Standard EN 61000-6-1:2001 has the status of a **British Standard** 

ICS 33.100.20



# National foreword

This British Standard is the official English language version of EN 61000-6-1:2001. It was derived by CENELEC from IEC 61000-6-1:1997 supersedes BS EN 50082-1:1998 which will be withdrawn on 2004-67-0. The CENELEC common modifications 1

The CENELEC common modifications have been implement deche appropriate places in the text and are indicated by common notification tags [5] (5]

The UK participation in its preparation was entersted by Technical Committee GEL/210, EMC-Policy, to Subcommittee GEL/210/12, Basic and Generic standards, which has the respondibility to:

- aid enquirers to inderstand the text;
- present to the responsible European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed:
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

From 1 January 1997, all IEC publications have the number 60000 added to the old number. For instance, IEC 27-1 has been renumbered as IEC 60027-1. For a period off time during the change over from one numbering system to the other, publications may contain identifiers from both systems.

#### **Cross-references**

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Electrotechnical Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 23 October 2001

# Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 16, an inside back cover, and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

#### Amendments issued since publication

Amd. No.	Date	Comments	

© BSI 23 October 2001

ISBN 0 580 38590 6

# EUROPEAN STANDARD

# EN 61000-6-1

# NORME EUROPÉENNE

# EUROPÄISCHE NORM

ICS 33,100

ersion a-gauge sepersedes EN 50082-1:1997 Electromagnetic compatibility (EMC) Pant 6 1 Generic standards -Immunity for residential, commercial and hight-industrial environments (IEC 61000-6-1:1997, modified)

Compatibilité électromagnétique (CEM) Partie 6-1: Normes génériques -Immunité pour les environnements résidentiels, commerciaux et de l'industrie légère (CEI 61000-6-1:1997, modifiée)

Elektromagnetische Verträglichkeit (EMV) Teil 6-1: Fachgrundnormen -Störfestigkeit -Wohnbereich, Gechäfts- und Gewerbebereiche sowie Kleinbetriebe (IEC 61000-6-1:1997, modifiziert)

This European Standard was approved by CENELEC on 2001-07-03. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

# **CENELEC**

European Committee for Electrotechnical Standardization Comité Européen de Normalisation Electrotechnique Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

#### **Foreword**

The text of the International Standard IEC 61000-6-1:1997, prepared by Electromagnetic compatibility, together with the common modifications prepared Technical Committee CENELEC TC 210, Electromagnetic compatibility (EMC) Carbumitted to the formal vote and was approved by CENELEC as EN 61000-6-1 on 2001-03.

This European Standard supersedes EN 50082-1:1997.

The following dates were fixed:

latest date by which the EN has to be implemented at national level by publication of an identical national standard or by

(dop) 2002-04-01

latest date by which the national standards conflicting with the EN have to be withdrawn

(dow) 2004-07-01

Annexes designated "normative" are part of the body of the standard. In this standard, annex ZA is normative. Annex ZA has been added by CENELEC.

#### **Endorsement notice**

The text of the International Standard IEC 61000-6-1:1997 was approved by CENELEC as a European Standard with agreed common modifications as given below.

## **CONTENTS**

	os.C	Page
IN	Scope and object Normative references Definitions Description of locations  Performance criteria	2
	ina-go	
Cla	use Cilli,	
1	Scope and object	5
2	Normative references	6
3	Definitions	7
4	Description of locations	7
5	Performance criteria	8
6	Conditions during testing	9
7	Product documentation	10
8	Applicability	10
9	Immunity test requirements	10
Та	bles	
1	Immunity – Enclosure port	11
2	Immunity – Ports for signal lines and control lines	12
3	Immunity – DC input and d.c. output power ports	13
4	Immunity – Input and output a.c. power ports	14
5	Immunity – Functional earth ports	15
	nex ZA (normative) Normative references to internatinal publications with their responding European publications	16

INTRODUCTION

IEC 61000 is published in separate parts according to the following structure:

Part 1: General

General considerations (introduction, fundamental principles)

Definitions, terminology

Part 2: Environment

Description of the environment

Classification of the environment

Compatibility 1----

Compatibility levels

Part 3: Limits

**Emission limits** 

Immunity limits (insofar as they do not fall under the responsibility of the product committees)

Part 4: Testing and measurement techniques

Measurement techniques

Testing techniques

Part 5: Installation and mitigation guidelines

Installation guidelines

Mitigation methods and devices

Part 6: Generic standards

Part 9: Miscellaneous

Each part is further subdivided into sections which can be published either as International Standards or technical reports.

# **ELECTROMAGNETIC COMPATIBILITY (EMC) –**

Part 6: Generic standards –
Section 1: Immunity for residential, commercial and light-industrial environments

1 Scope and object

This section of IEC 61000-6 for EMC immunity requirements applies to electrical and described in clause 4 apparatus intended for use in clause 4, of which no dedicated product or product-family immunity standard

Immunity requirements in the frequency range 0 Hz to 400 GHz are covered.

Where a relevant dedicated product or product-family EMC immunity standard exists, it shall take precedence over all aspects of this generic standard.

This standard applies to apparatus intended to be directly connected to a low-voltage public mains network or connected to a dedicated d.c. source which is intended to interface between the apparatus and the low-voltage public mains network. This standard applies also to apparatus which is battery operated or is powered by a non-public, but non-industrial, lowvoltage power distribution system if this apparatus is intended to be used in the locations described in clause 4.

Apparatus intended to be connected to an industrial power network and apparatus intended to be operated in an industrial environment are covered by the industrial generic standard, IEC 61000-6-2.

The object of this standard is to define the immunity test requirements for apparatus defined in the scope in relation to continuous and transient, conducted and radiated disturbances including electrostatic discharges.

These test requirements represent essential electromagnetic compatibility immunity requirements.

The immunity requirements have been selected to ensure an adequate level of immunity for apparatus at residential, commercial and light-industrial locations. The levels do not however cover extreme cases which may occur at any location but with an extremely low probability of occurrence. Not all disturbance phenomena have been included for testing purposes in this standard but only those considered as relevant for the equipment covered by this standard.

Test requirements are specified for each port considered.

NOTE - In special cases, situations will arise where the levels of disturbances may exceed the test levels specified in this standard; for example where a hand-held transmitter is used in proximity to an apparatus. In these instances, special mitigation measures may have to be employed.

### 2 Normative references

© NOTE Normative references to international publications are listed in the annex ZA (normative). ©

http://www.china-gauges.com/

#### 3 Definitions

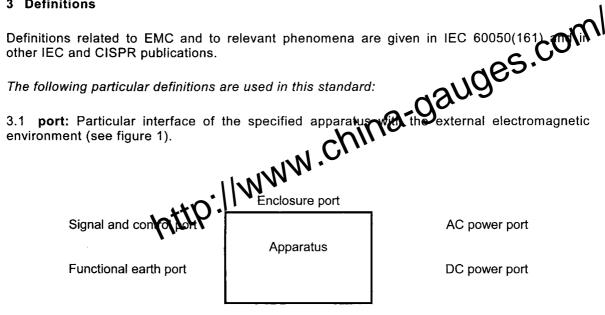


Figure 1 - Examples of ports

- 3.2 enclosure port: The physical boundary of the apparatus which electromagnetic fields may radiate through or impinge on.
- 3.3 cable port: A point at which a conductor or a cable is connected to the apparatus. Examples are signal, control and power ports.
- 3.4 public mains network: Electricity lines to which all categories of consumers have access and which are operated by a supply or distribution undertaking for the purpose of supplying electrical energy.
- © 3.5 functional earth port: Cabel port other than signal, control or powerport, intended for connection to earth for purposeesother than electrical safety.

### 4 Description of locations

The environments encompassed by this standard are residential, commercial and lightindustrial locations, both indoor and outdoor. The following list, although not comprehensive, gives an indication of locations which are included:

- residential properties, for example houses, apartments;
- retail outlets, for example shops, supermarkets;
- business premises, for example offices, banks;
- areas of public entertainment, for example cinemas, public bars, dance halls;
- outdoor locations, for example petrol stations, car parks, amusement and sports centres;
- light-industrial locations for example workshops, laboratories, service centres.

Locations which are characterised by being supplied directly at low voltage from the public mains network are considered to be residential, commercial or light-industrial.

#### 5 Performance criteria

The variety and the diversity of the apparatus within the scope of this standard makes it divinity to define precise criteria for the evaluation of the immunity test results.

If, as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe, the apparatus shall be deemed to have failed makes.

A functional description and a definition of performance of the EMC testing, shall be provided by the manufacture and noted in the test report, based on the following criteria:

Performance criterion A: The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is selfrecoverable or can be restored by the operation of the controls.

### 6 Conditions during testing

zs.com The tests shall be made in the frequency bands being investigated, with the susceptible operating mode consistent with account in the frequency bands being investigated, with the susceptible operating mode consistent with account in the frequency bands being investigated, with the susceptible operating mode consistent with account in the frequency bands being investigated, with the susceptible operating mode consistent with account in the frequency bands being investigated. susceptible operating mode consistent with normal applications. The obligaration of the test sample shall be varied to achieve maximum susceptibility.

If the apparatus is part of a system, or can be connected to auxiliary apparatus, the apparatus shall be tested while connected to the minimum representative configuration of auxiliary apparatus necessary to exercise the ports it a similar manner to that described in CISPR 22.

In cases where a manufacture specification specifically requires external protection devices or measures which are class, specified in the user's manual, the test requirements of this standard shall be applied with the external protection devices or measures in place.

The configuration and mode of operation during the tests shall be precisely noted in the test report. It is not always possible to test every function of the apparatus; in such cases the most critical mode(s) of operation shall be selected.

If the apparatus has a large number of similar ports or ports with many similar connections, a sufficient number shall be selected to simulate actual operating conditions and to ensure that all the different types of termination are covered.

The tests shall be carried out within the operating ranges of temperature, humidity and pressure specified for the product and at the rated supply voltage, unless otherwise indicated in the basic standard.

If the manufacturer is using his own specification for an acceptable level of Elemperformance or degradation of EMC performance during or after the testing required by the standard, this shall be stated in the user documentation. This specification shall be made available upon request.

8 Applicability

The application of tests for evaluation of immunity depends on the particular configuration, its ports, its testinology and its operation.

Tests shall be applied to the relevant ports of the apparatus according to tables 1 to 5. Tests shall only be carried out where the relevant ports exist.

It may be determined from consideration of the electrical characteristics and usage of a particular apparatus that some of the tests are inappropriate and therefore unnecessary. In such a case it is required that the decision and justification not to test shall be recorded in the test report.

### 9 Immunity test requirements

The immunity test requirements for apparatus covered by this standard are given on a port by port basis.

Tests shall be conducted in a well-defined and reproducible manner.

The tests shall be carried out individually as single tests in sequence. The sequence of testing is optional.

The description of the test, the test generator, the test methods, and the test set-up to be used are given in basic standards which are referred to in the following tables.

The contents of these basic standards are not repeated here, however modifications or additional information needed for the practical application of the tests are given in this standard.

Table 1 – Immunity – Enclosure port

Environmental phenomena	a Test specifications	Units	Basic standards	Remarks	Performance criterion
1.1 Power-frequency magnetic field	3	Hz A/m	IEC 61000-4-8	The test shall be carried out at the frequencies appropriate to the power supply frequency. Equipment intended for use in areas supplied only at one of these frequencies need only be tested at that frequency.  See notes 1 and 2	₹
Radio-frequency electromagnetic field. Amplitude modulated	80 to 1 000 3	MHZ V/m % AM (1 kHz)	IEC 61000-4-3	The test-evel specified is the r.m.s. value of the remmodulated carrier.	∢
3 Contact Electrostatic discharge discharge Air	±4 (charge voltage) ±8 (charge voltage)	KV KV	IEC 61000-4-2	See basic standar for applicability of contact and/of ardischarge test	8 B
Applicable only to apparatus cor For CRTs, the acceptable jitter portional to the magnetic field st	ntaining devices susceptible to depends upon the character ( irength, tests can be carried o	magnetic fields. size and is calculated for a test l ut at other test levels extrapolatin	level of 1 A/m: jitter ( ng the maximum jitter	mm) = (3 × character sizemm) + 1) / 40. As level appropriately.	s jitter is linearly
				a-gauges.com	COLL

	2 App	NOTES 1 The		2.2		2.1	
	oplicable only to ports interfecing	The test level can also be befored as the equivalent current into a 150 Ω load.	-Q	Fast transients	106	Radio-fleatency common	En iro mental phenomena
http://www.	with cables whose total len	as the equivalent current int	Ci (	±0,5	80	0,15 to 80	Test specifications
	2 Applicable only to ports interfecing with cables whose total length according to the manufacturer's functional specification may exceed 3 m. © ©	o a 150 Ω load.	Repetition frequency kHz	kV (charge voltage) Tr/Th ns	V % AM (1 kHz)	MHz	Units
	r's functional specifi			IEC 61000-4-4		IEC 61000-4-6	Basic standards
	cation may exceed 3 m.		especially social	See note 2.	The test level specified is the r.m.s. value of the unmodulated carrier	See notes 1, 2.[c] 〈C	Remarks
				В		Þ	Performance criterion

Table 2 – Immunity – Ports for signal lines and control lines

Table 3 - Immunity - DC input and d.c. output power ports

A transients

NOTES

1 The test level can also be defined as the equivalent current into a 150 Ω load. Applicable only to input ports. Evijanmental phenomena 4.4 4.3 4.2 Radio-Gallency common de Voltage dips
Voltage dips
Truptions

Tage

Truptions

Truptions 1,2/50 (8/20) > 95 250 0,5 0,15 to 80 60 30 80 Test specifications Tr/Th µs MHz kV (charge voltage) kV (charge voltage) kV (charge voltage) periods periods % reduction % reduction periods % reduction % AM (1 kHz) Repetition frequency kHz Units Basic standards IEC 61000-4-11 IEC 61000-4-11 IEC 61000-4-4 IEC 61000-4-5 IEC 61000-4-6 The test level specified is the r.m.s. value of the unmodulated carrier. Voltage shift at zero crossing. Voltage shift at zero crossing See notes 1.[C] (C) See note 2 See note 2 Remarks Performance criterion σ σ O O σ ⋗

Table 4 – Immunity – Input and output a.c. power ports

Table 5 – Immunity – Functional earth ports

Performance criterion	∢.			В					i i	
Remarks	See notes 1.[C) (C)	The test level specified is the r.m.s. value of the	חוווסחחומופת כמווופו	See note 2	Capactive clamp used (C	itt	17	:!	ation may exce <mark>ed m.</mark>	ww.china-gauges.com
Basic standards	IEC 61000-4-6			IEC 61000-4-4					s functional specific	
Units	MHz	>	% AM (1 kHz)	kV (charge voltage)	Tr/Th ns	Repetition frequency kHz		50 Ω load.	th according to the manufacturer	
Test specifications	0,15 to 80	င	80	5,0±	2/50	ſΩ		equivalent current into a 15	vith cables whose total leng	
Environmental phenomena	Radio-frequency common	a pode		Fast transients				est level can be defined as the	able only to ports interfacing w	
	5.1			5.2			NOTES	1 The te	2 Applic	

# **Annex ZA**

Normative references to international publications with their corresponding European publications.

This European Standard incorporates by undated reference, provisions from othe publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter.

When there is an undated reference.

When there is an undated reference to a generic, product or product-family standard which has been listed in the OJEC, then either the latest edition or in the date of cessation of presumption of conformity associated with the latest edition has not extinct the superseded edition may be applied. After the date of cessation of presumption of conformity, we latest edition shall be applied.

When there is an undated reference to a basic standard, then either the latest edition or (if the date of withdrawal of conflicting standards associated with the latest edition has not expired) the superseded edition may be applied. After the date of withdrawal, the latest edition shall be applied.

<u>Publication</u>	<u>Title</u>	EN/HD
IEC 60050-161	International Electrotechnical Vocabulary (IEV) Chapter 161: Electromagnetic compatibility	-
IEC 61000-4-2	Electromagnetic compatibility (EMC) Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	EN 61000-4-2
IEC 61000-4-3	Electromagnetic compatibility (EMC) Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	EN 61000-4-3
IEC 61000-4-4	Electromagnetic compatibility (EMC) Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	EN 61000-4-4
IEC 61000-4-5	Electromagnetic compatibility (EMC) Part 4-5: Testing and measurement techniques - Surge immunity test	EN 61000-4-5
IEC 61000-4-6	Electromagnetic compatibility (EMC) Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio- frequency fields	EN 61000-4-6
IEC 61000-4-8	Electromagnetic compatibility (EMC) Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	EN 61000-4-8
IEC 61000-4-11	Electromagnetic compatibility (EMC) Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	EN 61000-4-11
IEC 61000-6-2	Electromagnetic compatibility (EMC) Part 6-2: Generic standards - Immunity for industrial environments	EN 61000-6-2
CISPR 22	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement	EN 55022

# **BSI** — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the

Revisions

British Standards are updated by amendment or revision. Usars of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000 Pax: 020 8996 7400.

mbers an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### **Buying standards**

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001. Standards are also available from the BSI website at http://www.bsi-global.com.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

#### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001. Further information about BSI is available on the BSI website at http://www.bsi-global.com.

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means - electronic, photocopying, recording or otherwise - without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.

BSI 389 Chiswick High Road London W4 4AL